




## DESCRIPTION

OUTLED 32 is a 32 mm diameter recessed LED projector design to be installed in floors, walls or ceilings.



## SPECIFICATIONS

### Nominal Power:

4.OL32.xx.xxx.070    350.. 700mA    1,0.. 2,0W

### Flux:

3000K                    268 lm  
4000K                    275 lm

### Light colour options:

Warm white    830   3000K  
Natural white   840   4000K

### Secondary optics option:

Optics with a narrow beam    11°  
Optics with a narrow beam    15°  
Optics with a narrow beam    23°  
Optics with a average beam    38°  
Optics with a wide beam  
Optics with a elliptical beam  
Optics with a asymmetric beam

### Projector body:

Aluminum alloy

### Finish:

Anodized aluminum

### Covering:

Transparent glass  
Opaque tempered glass

### Connection:

Neoprene cables 2x0,35 600mm

### Other technical features:


Insulation class I, III  
EN 62471:2009 risk-free

Cable available on demand, 2m,5m,10m,15m,20m


Available on demand 2200K,2700K,5500K

Note: all the data above are typical and can change without notice


### CONIC DIAGRAM 11°

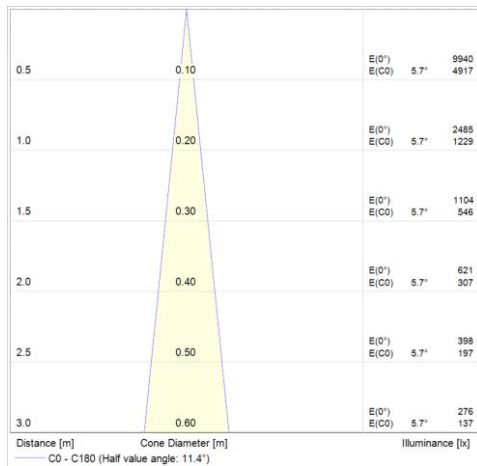


### POLAR DIAGRAM 11°

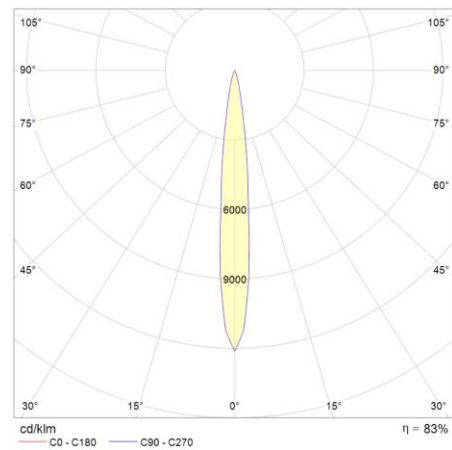


### CONIC DIAGRAM 15°

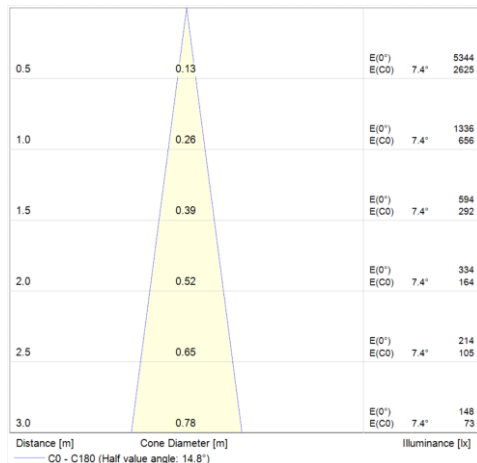


### POLAR DIAGRAM 15°

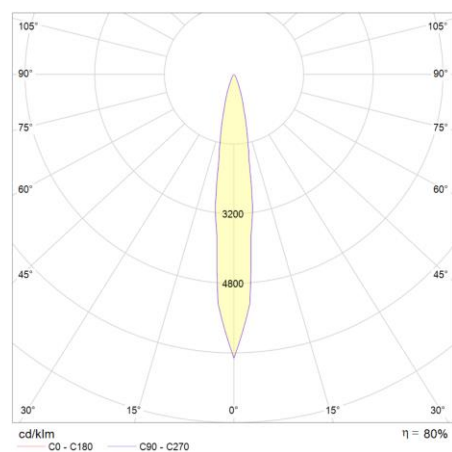


### CONIC DIAGRAM 23°

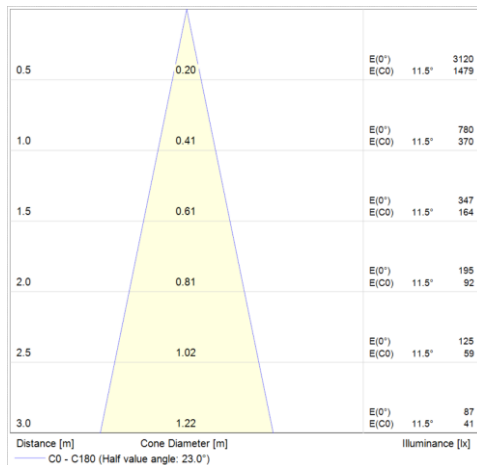


### POLAR DIAGRAM 23°

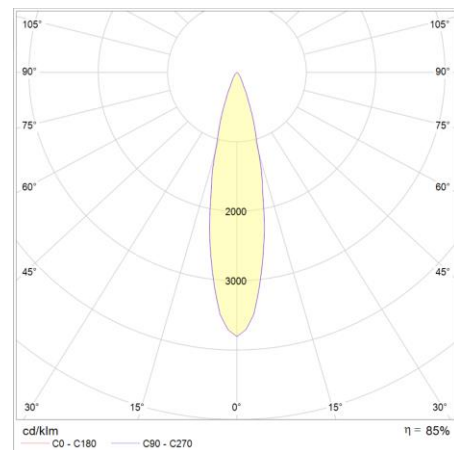

### CONIC DIAGRAM 38°

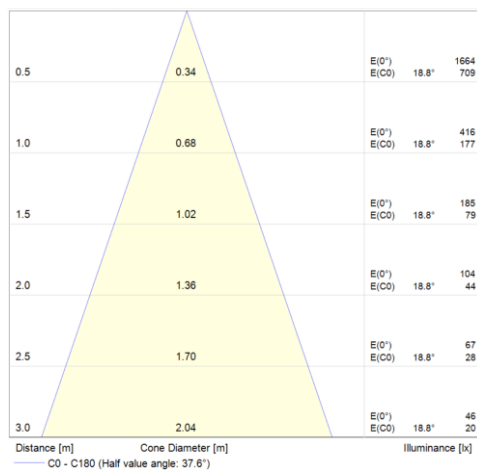

### POLAR DIAGRAM 38°

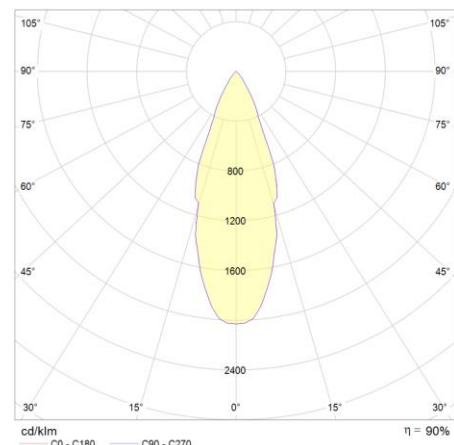

## ADDITIONAL NOTES FOR THE INSTALLATION

OUTLED 32 cannot be installed in areas where water heavily stagnates and it must never go completely underwater. For a proper installation, the projector must have a drainage system under the outer casing.

Cable polarity : brown or red positive +, blue or black negative -

PLEASE PAY ATTENTION. If the cable is repositioned, check the efficiency of the seal on the cable gland.

## BASE / OUTER CASING



Co.E.M. srl reserves the right to improve the product in terms of performance and manufacturing without any obligations of prior communication to the client.

Release 2.0 . 2020