




DESCRIPTION

BRIGHT 32 is a 32mm diameter LED projector design to be installed in walls, ceilings or floors. It presents an aluminium body.



SPECIFICATIONS

Nominal Power:

4.BR32.xx.xxx.070 350.. 700mA 1,0.. 2,0W

Flux:

3000K 147.. 268 lm
 4000K 150.. 275 lm

Light colour options:

Warm white 830 3000K
 Natural white 840 4000K

Secondary optics option:

Optics with a narrow beam 11°
 Optics with a narrow beam 15°
 Optics with a narrow beam 23°
 Optics with a average beam 38°
 Optics with a wide beam
 Optics with an elliptical beam
 Optics with an asymmetric beam

Projector body:

Aluminum alloy

Finish:

Anodized aluminum

Covering:

Transparent glass
 Opaque tempered glass

Connection:

Neoprene cables 2x0,35 600mm


Other technical features:

Insulation class III
 EN 62471:2009 risk-free


Cable available on demand, 2m,5m,10m,15m,20m
 Available on demand 2200K,2700K,5500K,3000K CR190

Note: all the data above are typical and can change without notice


CONIC DIAGRAM 11°

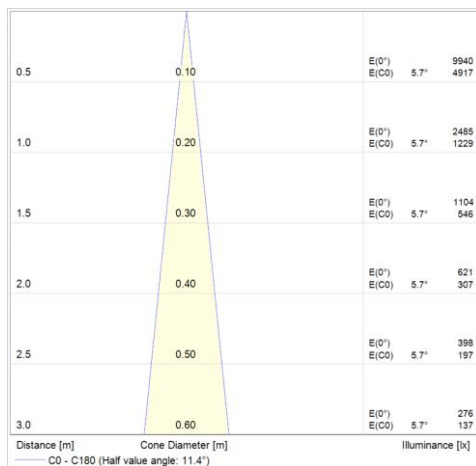


POLAR DIAGRAM 11°

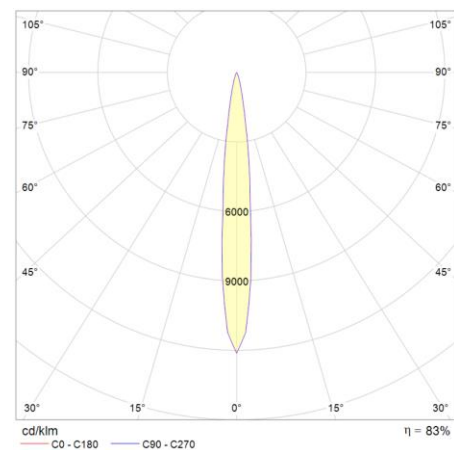


CONIC DIAGRAM 15°

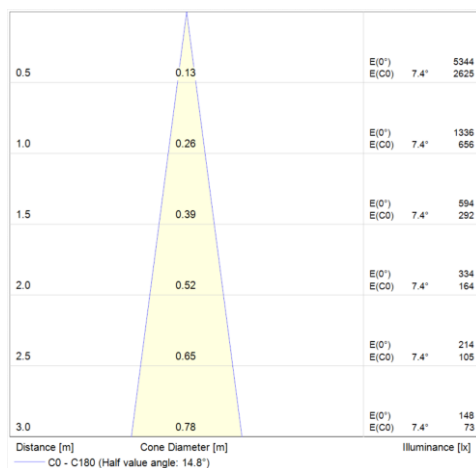


POLAR DIAGRAM 15°

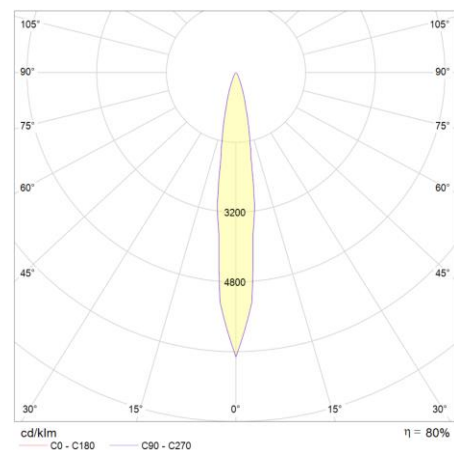


CONIC DIAGRAM 23°

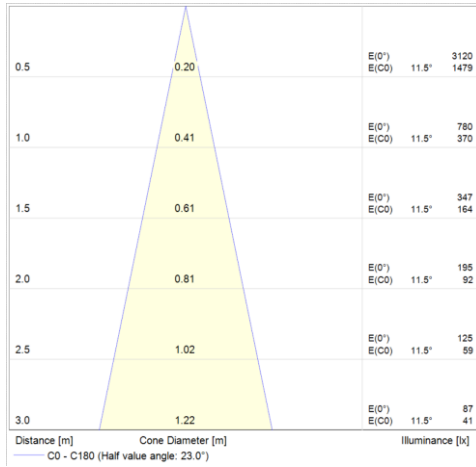


POLAR DIAGRAM 23°

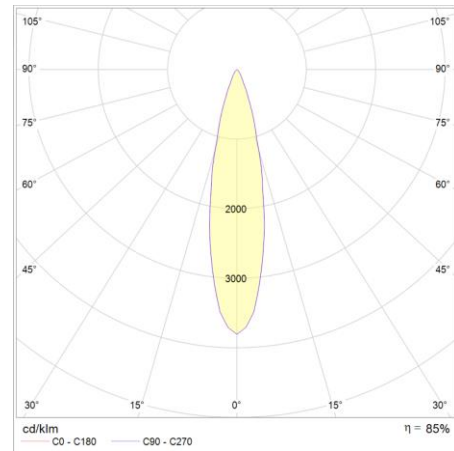

CONIC DIAGRAM 38°

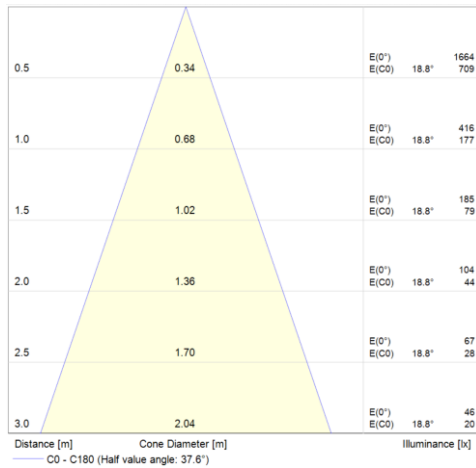

POLAR DIAGRAM 38°

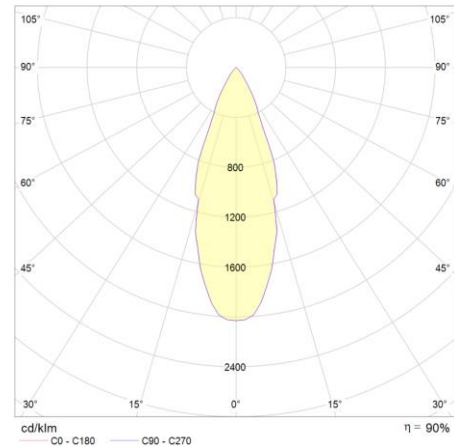

Co.E.M. srl reserves the right to improve the product in terms of performance and manufacturing without any obligations of prior communication to the client.

Release 2.0 . 2020